

SKOBLIN, I. H.

Gidravlichskie dvigateli sel'skikh gidroelektrosilovykh ustanovok. Moskva,
Sel'khozgiz, 1950. 168 p.

Hydraulic motors of rural water-power electric plants.

SO: Manufacturing and Mechanical Engineering in the Soviet Union, Library of
Congress, 1953

SECRET, IV

PHASE I BOOK EXPLOITATION

SOV/4731

German, Avraam L'vovich, and Ivan Nikolayevich Skoblin

Montazh, ekspluatatsiya i remont oborudovaniya malykh i srednikh gidroturbin
(Assembly, Operation, and Repair of the Equipment of Small and Medium-Sized
Hydraulic Turbines) Moscow, Mashgiz, 1959. 260 p. 3,500 copies printed.

Reviewer: V.N. Vorob'yev, Engineer; Ed.: N.Ya. Bauman, Engineer; Managing Ed.
(Ural-Siberian Department, Mashgiz): M.A. Bezukladnikov, Engineer; Tech. Ed.:
N.A. Dugina.

PURPOSE: This book is intended for qualified technical personnel engaged in the
assembly, operation, and repair of the equipment of small and medium-sized
hydroelectric stations.

COVERAGE: The book gives principles of operation, design, technology of assembly
and repair of hydroturbines, automatic speed regulators, and auxiliary equipment.
The authors describe the starting, tuning, and operation of the mechanical equip-
ment of small and medium-sized hydroelectric stations and discuss difficulties
in the operation of hydromechanical equipment. Information is given on the

Card 1/9

Assembly, Operation, and Repair of the Equipment (Cont.) SOV/4731

causes of such difficulties and the means for eliminating them. Some methods for increasing the power of hydroelectric stations and the output of electrical energy are also discussed. Chaps. I, III, and V were written by Engineer I.N. Skoblin and Chs. II and IV by Engineer A.L. German. No personalities are mentioned. There are 31 references, all Soviet.

TABLE OF CONTENTS:

Foreword	3
Ch. I. General Information on the Use of River-Water Energy and on the Water-Power Equipment of Small and Medium-Sized Hydroelectric Stations (GES)	5
1. Mechanical energy of water and units for measuring stream power	5
2. Basic systems and methods of the use of river-water energy in GES	6
3. Water-power equipment of GES	9
Impulse hydroturbines	9
Reaction hydroturbines	10
Cavitation	13
Systems and designs of hydrotrubines	14
Velocity of hydroturbines	15

Card 2/9

SKODLINA, M. N.

3

11000.

Composition and dissociation constant of bismuth thiocyanate. F. S. Frum and M. N. Skodlina. *Vysokye Zapiski Gor'kov. Univ.* 1953, No. 24, 144-145. *Khimiya Zhur.* Khim. 1954, No. 28000. — The compn. was detd. from measurements of the optical d. of mixts. of 0.23M solns. of Bi(NO₃)₃ and NH₄CNS taken in various proportions while a const. vol. of the mixt. was maintained. Max. optical d. was observed at a ratio [Bi³⁺]:[CNS⁻] = 1:3. Thus, the formula for Bi thiocyanate is Bi(CNS)₃. The dis-ocn. const. $K = [Bi^{3+}][CNS^{-}]^3/[Bi(CNS)_3] = 0.11$. M. Hosh.

11000

SKOBLINA, M.N.

Dimensionless characteristics of the length of mitotic phases of
first cleavage divisions in axolotl. Dokl. AN SSSR 160 no.3:700-
703 Ja '65. (MIRA 18:3)

1. Institut morfologii zhivoynykh im. A.N. Severtsova AN SSSR.
Submitted May 19, 1964.

SHAYEVICH, A.B.; SKOBLINA, N.M.

Spectral analysis of carbon, silicon, and phosphorus in
ferromanganese. Zav.lab.22 no.2:195-196 F'56.(MIRA 9:6)

1.Laboratoriya standartnykh obraztsov pri Ural'skom insti-
tute chernykh metallov.
(Ferromanganese--Spectra)

SKOBLINA, Z.A.

Anatomicoradiographic characteristics of the supracondylar
fractures. Trudy Ukr. nauch.-issl. inst. ortop. i travm.
no.15:155-160 '59 (MIRA 16:12)

1. Iz otdela fiziologii i patomekhaniki (zav. otdelom - doktor
med. nauk O.V.Nedrigaylova) Ukrainskogo nauchno-issledovatel'-
skogo instituta ortopedii i travmatologii imeni prof. M.I.
Sitenko (dir.-chlen-korrespondent AMN SSSR, prof. N.P.
Novachenko).

SKOBLINSKIY, A., inzh.; KACHANOV, P., inzh.

Mobile plant for large-panel apartment-house construction.
Zhil. stroi. no.1:31 '64. (MIRA 18:11)

SKOBLIONOK, R. F.

USSR

Exchange adsorption in mixed media. I. Quantitative rules of cation exchange in mixed media. A. T. Davydov and R. F. Skoblionok. *Trudy Nauch.-Issledovatel. Inst. Khim. Khar'kov. Univ.* 10, 106-203 (1963).—The exchange of Ca^{++} and Ba^{++} for Na^+ and K^+ was studied on glauconite in water and water-alc. mixts. contg. 30, 50, and 70 wt. % of alc. Glauconite satd. with the bivalent cation was covered with a soln. of NaCl or KCl . After reaching equil., the amt. of desorbed Ca or Ba was assumed to be equal to the quantity of adsorbed K or Na . The quantity of the bivalent cation in the adsorbent was calcd. from the difference between the max. adsorption and the quantity of desorbed ion. Under these conditions the Nikolski equation (C.A. 33, 3623) appears, $\sqrt{(a_m - a)(2)/u} = K\sqrt{c_0/c_1}$ or after simplification: $a = a_m - K^2 a / (100 C_0 - a)^2$, where a is the milligram equiv. of the bivalent cation desorbed from 10 g. of adsorbent and equals the quantity of adsorbed univalent cation, a_m is the max. adsorption, C_0 is the initial concn. of univalent cation in millimole per l., and K is the adsorption const. The exptl. results are presented as isotherms on coordinates $1/u$, $a/2/(100 C_0 - a)$ (cf. Gapon equation, C.A. 28, 4149) where a is the quantity of ion in mg. equiv. desorbed from 10 g. of adsorbent and C_0 is the initial concn. of the ion being adsorbed in millimole per l.

Over

SE

a. I. Vanyukov

or on coordinates $a, a[2/(100 C_1 - a)]^2$ (modified Nikol'ski equation). The linear shape of the isotherms shows the applicability of these equations to exchange reactions in these systems. Addn. of a solvent with a small dielec. const. shifted the equil. toward displacement of bivalent cations; addn. of 50% alc. lowered the value of the equil. const. to half. The compn. of the solvent had no effect on a_m of glauconite. Use of the modified Nikol'ski equation simplifies the study of cationic exchange. II. Exchange of different valent cations on glauconite in dioxane-water medium. *Ibid.* 205-8. — The exchange of Ba for Na on glauconite was studied in a 70% soln. of dioxane in water. The results were similar to those obtained for water-alc. mixts. The energy of K ion adsorption is appreciably higher than Na ion, and this difference increases with the content of the org. solvent in the mixt. Through *Referat. Zhur., Khim.* 1954, Nos. 35713, 35714. M. Hosh

2/2

SKOBLIONOK, R. F.

Dissertation: "Investigation of the Adsorption Exchange with Organic and Inorganic Adsorbents from mixed agents." Cand Chem Sci, Khar'kov State U, Khar'kov 1954.
(Referativnyy Zhurnal---Khimiya, Moscow, No 9, May 54)

SO: SUM 318, 23 Dec 1954

SKoblionov, R.F.

Dependence of exchange sorption of organic ions on their structure. A. T. Davydov and R. F. Skoblionov (A. M. Gor'kiy State Univ., Kharkov). *Abstracts of Chemistry*, 31-3 (1950).—Sulfonated charcoal satd. with Ca^{++} was equilibrated with PhNH_2HCl and the 3 toluidine-HCl isomers. In Capon's equation, $(1/a) = (1/a_m) + (K \sqrt{a/2}/1000ac)$, the const. K was 13.9–15.3 and the max. amt. a_m taken up by 10 g. sorbent was 0.52–0.66 meq. for all 4 salts; thus, the introduction of a Me group had no effect on the ion exchange. a is the amt. exchanged (for 10 g. sorbent) and c is the final concn. of the amine salt. At high c , the amt. of Ca displaced was smaller than the amt. of the amine taken up; perhaps mol. adsorption took place. J. J. Bikerina

PM

DAVYDOV, A.T.; SKOBLIONOK, R.F.

Dependence of cation exchange adsorption on the dielectric constant
of the medium [with English summary in insert]. Koll.zhur. 18 no.2:
163-166 Mr-Apr '56. (MLRA 9:8)

1. Khar'kovskiy gosudarstvennyy universitet imeni A.M. Gor'kogo,
kafedra obshchey khimii.
(Cations) (Adsorption)

USSR/Physical Chemistry - Surface Phenomena. Adsorption. Chromatography. Ion Exchange, B-13

Abst Journal: Referat Zhur - Khimiya, No 19, 1956, 61226

Author: Davydov, A. T., Skoblionek, R. F.

Institution: None

Title: Investigation of Exchange Adsorption of Cations from Mixed Media on Volkonskoite

Original

Periodical: Zh. obshch. khimii, 1956, 26, No 2, 350-355

Abstract: Investigation of the correlations in the absorption of Na^+ and K^+ by Ba-forms of volkonskoite, from aqueous alcohol and aqueous dioxane solutions of their chlorides. It was found that the exchange capacity of the sorbent remains constant with all compositions of the solvent. The equilibrium constant calculated in accordance with the equation of Ye. N. Gapon, or B. P. Nikol'skiy, increases with increase of the dielectric permittivity of the medium.

Card 1/1

DAVYDOV, A.T.; SKOBLIONO, R.F.

Study of the exchange sorption of organic ions. Zhur.ob.khim. 26
no.7:1860-1862 J1 '56. (MIRA 9:10)

1. Khar'kovskiy gosudarstvennyy universitet.
(Sorption) (Ions)

DAVYDOV, A.T.; SKOBLIONOK, R.F.

Structure dependence of ionic sorption exchange, Part 2, The
sorption of bivalent amines, Koll.zhur, 19 no.2:183-187 Mr-Apr
'57. (MLRA 10:5)

1.Khar'kovskiy gosudarstvennyy universitet im. A.M. Gor'kogo,
Kafedra obshchey khimii.
(Sorption) (Amines)

AUTHOR: Davydov, A. T., Skoblionok, R. P. SOV/76-32-8-2/37

TITLE: The Influence of the Medium on the Ion Exchange Adsorption (Vliyaniye sredy na ionoobmennuyu adsorbtsiyu) The Dependence of the Exchange Constant on the Dielectric Constant of the Solvent (Zavisimost' konstanty obmena ot dielektricheskoy postoyannoy rastvoritelya)

PERIODICAL: Zhurnal fizicheskoy khimii, 1958, Vol. 32, Nr 8, pp. 1705-1710 (USSR)

ABSTRACT: The publications by N.A. Shilov (Ref 12), M.M. Dubinin (Ref 13), Vigner and Jenny (Vigner and Yenni) (Ref 9), A.M. Pryunishnikova (Ref 1), D.N. Strazhesko (Refs 10,11), Kressman and Kitchener (Ref 3), show that the influence of the composition of the liquid phase on absorption processes is determined by several factors. To find a possibility of determining the maximum effect in these processes the authors investigated the dielectric constant of the solvent. The inter-dependence between the exchange constant and the dielectric constant of the solvent already observed may be explained by a change of the activity coefficient. To prove

Card 1/3

The Influence of the Medium on the Ion Exchange Adsorption. The Dependence of the Exchange Constant on the Dielectric Constant of the Solvent

SCV/76-32-8-2/37

this the equations by B.P. Nikol'skiy (Ref 14) and Ye.N. Gapon (Ref 19) are explained and a derivation of the equations is carried out according to explanations by V.K. Semenchenko (Ref 21), with data by Scatchard (Skatchard) (Refs 22,23) being used. It was found that the function $\lg K = f(1/D)$ is represented by a curve of second order. In the case that the radius of the displacing ion is smaller than that of the displaced ion the summary curve has the shape of a hyperbola. This is found in the exchange of Ca^{2+} and Ba^{2+} ions on K^+ and Na^+ ions. If, however, the radius of the displacing ion is greater than that of the displaced one a parabolic curve is obtained. It will occur in an exchange adsorption of the Li^+ ion. There are 2 figures, 3 tables, and 23 references, 19 of which are Soviet.

Car 2/3

The Influence of the Medium on the Ion
Exchange Adsorption. The Dependence of the Exchange Constant on the
Dielectric Constant of the Solvent

SOV/76-32-8-2/37

ASSOCIATION: Khark'kovskiy gosudarstvennyy universitet im. A.M. Gor'kogo
(Khark'kov State University imeni A.M. Gor'kiy)

SUBMITTEL: June 4, 1956

Card 5/5

SKOBLIONOK, R.F.; DAVYDOV, A.T.

Exchange sorption of ions from nonaqueous media. Part 1. Zhur.
fiz. khim. 37 no.12:2648-2653 D '63. (MIRA 17:1)

1. Khar'kovskiy gosudarstvennyy universitet imeni A.M.'Gor'kogo.

1. V. I. KOPOLONOK, R. I.

Exchange ion sorption from nonaqueous media: effect of acid
solvents on the sorption of univalent cations. Koll. zhur.
26 no. 4:425-430 (1964) (MIRA 17:9)

1. Abn. Kazanskoy universitet, kafedra obshchey khimii.

MIKHAYLOV, P.I.; SKOBLO, A.I.

Investigating the hydrodynamic mode of operation of fireboxes in
pipe-still models. Trudy MINKHIGP no.37:141-156 '62. (MIRA 17:3)

Sweating paraffin wax. M. A. BENTZIN and A. I. SKOBLIN, *Neftekhim. Khim.* 19, 90-107 (1930).—Expts. made on a lab. scale are described in detail. One and one-half to two times as much foot oil was obtained by using vacuum as by the usual method. Slack wax should be of uniform compn. and contain a complete series of paraffins, to assure a good yield of paraffin and smooth operation of the plant.

A. A. BORTNIKOV

A A BOWLING

ASO SLA METALLURGICAL LITERATURE CLASSIFICATION

ALPHABETIC INDEX																										NUMERIC INDEX																									
A-Z													0-9													A-Z													0-9												
<p>1. Badger pipe still in Grozny. B. I. BONDARENKO, A. I. SKURBA AND L. KUTENOK <i>Izvestiya Akademiya Nauk SSSR</i> 1932, No. 8, p. 75. Complete description with the results of experiments V. KALININ</p>																																																			
<p>430 514 DETAIL LITERATURE CLASSIFICATION</p>																																																			

Experimental coking of petroleum residues in coal-coke plants. A. I. Skoblo and G. T. Borshedomov. *Azerbaidzhan. Neftyan. Khim. Proizv.* 1933, No. 11-12, 105-8.—Expts. made with a Koppe coke furnace using asphalt contg. 81.3 and 40% volatile matter were unsatisfactory because of the construction of the furnace. The coke amtd. to 13 and 31.5% and contained ash 3.72-0.72, volatile matter 0.98-1.54, S 0.83-1.02 and H₂O 2.4%. Its mech. properties depended upon the time of coking. A. A. Roehlingk.

A. A. Bochtlingk

A.S.M. S.L.A. METALLURGICAL LITERATURE CLASSIFICATION

SECRET

SECRET - 19 MAY JUN

034437204

[illegible]

Pressure in tube stills. A. I. Skoblo, *Nefteyanoe Khozyaystvo* 24, 241-4 (1983).
In the calcul. of the pressure loss in tubular stills the following 2 cases should be distinguished: (1) the entire length of tubes in the furnace is filled with liquid and (2) the tubes contain a mist, of vapor and liquid. The loss of pressure in (1) can be calculated with a fair accuracy. In the region of low viscosities (of the magnitude of 0.01 sq. cm. per sec. and lower), a marked decrease of the viscosity has not much effect on the pressure drop. However, the loss in pressure cannot be calculated for the vapor-liquid phase.

A. A. Bochtlinga

ASB-SLA METALLURGICAL LITERATURE CLASSIFICATION

FROM: SVR 01100

Subject: ...

... ..

... ..

... ..

CA

1ST AND 2ND CODERS

PROCESSES AND PROPERTIES INDEX

3RD AND 4TH CODERS

22

Recirculating stripped condensates. A. I. Shklyo.
Azerbaidzhan'skiy Naftyanoy Akademyat 1934, No. 9,
78-82. Cakens. for recirculating the condensate from
various plates of the bubble tower are presented.
A. A. Bochtlingk

ASB-5LA METALLURGICAL LITERATURE CLASSIFICATION

1934-1935

1936-1937

1938-1939

1940-1941

1942-1943

1944-1945

1946-1947

1948-1949

1950-1951

1952-1953

1954-1955

1956-1957

1958-1959

1960-1961

1962-1963

1964-1965

1966-1967

1968-1969

1970-1971

1972-1973

1974-1975

1976-1977

1978-1979

1980-1981

1982-1983

1984-1985

1986-1987

1988-1989

1990-1991

1992-1993

1994-1995

1996-1997

1998-1999

2000-2001

2002-2003

2004-2005

2006-2007

2008-2009

2010-2011

2012-2013

2014-2015

2016-2017

2018-2019

2020-2021

2022-2023

2024-2025

2026-2027

2028-2029

2030-2031

2032-2033

2034-2035

2036-2037

2038-2039

2040-2041

2042-2043

2044-2045

2046-2047

2048-2049

2050-2051

2052-2053

2054-2055

2056-2057

2058-2059

2060-2061

2062-2063

2064-2065

2066-2067

2068-2069

2070-2071

2072-2073

2074-2075

2076-2077

2078-2079

2080-2081

2082-2083

2084-2085

2086-2087

2088-2089

2090-2091

2092-2093

2094-2095

2096-2097

2098-2099

2100-2101

2102-2103

2104-2105

2106-2107

2108-2109

2110-2111

2112-2113

2114-2115

2116-2117

2118-2119

2120-2121

2122-2123

2124-2125

2126-2127

2128-2129

2130-2131

2132-2133

2134-2135

2136-2137

2138-2139

2140-2141

2142-2143

2144-2145

2146-2147

2148-2149

2150-2151

2152-2153

2154-2155

2156-2157

2158-2159

2160-2161

2162-2163

2164-2165

2166-2167

2168-2169

2170-2171

2172-2173

2174-2175

2176-2177

2178-2179

2180-2181

2182-2183

2184-2185

2186-2187

2188-2189

2190-2191

2192-2193

2194-2195

2196-2197

2198-2199

2200-2201

2202-2203

2204-2205

2206-2207

2208-2209

2210-2211

2212-2213

2214-2215

2216-2217

2218-2219

2220-2221

2222-2223

2224-2225

2226-2227

2228-2229

2230-2231

2232-2233

2234-2235

2236-2237

2238-2239

2240-2241

2242-2243

2244-2245

2246-2247

2248-2249

2250-2251

2252-2253

2254-2255

2256-2257

2258-2259

2260-2261

2262-2263

2264-2265

2266-2267

2268-2269

2270-2271

2272-2273

2274-2275

2276-2277

2278-2279

2280-2281

2282-2283

2284-2285

2286-2287

2288-2289

2290-2291

2292-2293

2294-2295

2296-2297

2298-2299

2300-2301

2302-2303

2304-2305

2306-2307

2308-2309

2310-2311

2312-2313

2314-2315

2316-2317

2318-2319

2320-2321

2322-2323

2324-2325

2326-2327

2328-2329

2330-2331

2332-2333

2334-2335

2336-2337

2338-2339

2340-2341

2342-2343

2344-2345

2346-2347

2348-2349

2350-2351

2352-2353

2354-2355

2356-2357

2358-2359

2360-2361

2362-2363

2364-2365

2366-2367

2368-2369

2370-2371

2372-2373

2374-2375

2376-2377

2378-2379

2380-2381

2382-2383

2384-2385

2386-2387

2388-2389

2390-2391

2392-2393

2394-2395

2396-2397

2398-2399

2400-2401

2402-2403

2404-2405

2406-2407

2408-2409

2410-2411

2412-2413

2414-2415

2416-2417

2418-2419

2420-2421

2422-2423

2424-2425

2426-2427

2428-2429

2430-2431

2432-2433

2434-2435

2436-2437

2438-2439

2440-2441

2442-2443

2444-2445

2446-2447

2448-2449

2450-2451

2452-2453

2454-2455

2456-2457

2458-2459

2460-2461

2462-2463

2464-2465

2466-2467

2468-2469

2470-2471

2472-2473

2474-2475

2476-2477

2478-2479

2480-2481

2482-2483

2484-2485

2486-2487

2488-2489

2490-2491

2492-2493

2494-2495

1a

22

Standardization of coolers for refineries. B. I. Bondarenko and A. I. Skobko. *Neftyanoe Khozyaystvo* 26, No. 5, 50 (1984). The performance of various coolers (condensers), is analyzed and various recommendations for their improvement are made. A. A. Behtlingk

ASB.SLA METALLURGICAL LITERATURE CLASSIFICATION

Curve of a once-through evaporation of the cracked residue from a Winkler Koch unit, A. I. Skulko and K. V. Rozinkina. *Nefteprom Khimichesk* 20, No. 10, 44 (1934).—A curve is given reproducing the yields (percentage by wt.) mol. wts. and sp. grs. of fractions obtained in the distn. of the cracked residue from a Winkler-Koch cracking unit. A. A. B.

ASAC SLA DETECTION OF LITERATURE CLASSIFICATION

Sharp rectification in the distillation of crude oil A. I. Skoblo, *Azerbaidzhan'skoe Neftyanoe Khozaystvo* 1935, No. 4: 77-81. —The selection of a sharply rectifying tower is not recommended in cask, tube-still distn. equipment, because of the necessity of adding plates, a higher consumption of steam and the possible lowering of the yield of distillates. Corrections should be introduced in calcg. towers with a reflux of a compn. different from that of the distillate. A. A. Dorchling

ADD 36.6 PETROLEUM LITERATURE CLASSIFICATION

1214 119 8110

1214 119 8110

1214 119 8110

1214 119 8110

1214 119 8110

1214 119 8110

1214 119 8110

1214 119 8110

1214 119 8110

1214 119 8110

1214 119 8110

1214 119 8110

1214 119 8110

1214 119 8110

1214 119 8110

1214 119 8110

1214 119 8110

1214 119 8110

1214 119 8110

1214 119 8110

1214 119 8110

1214 119 8110

1214 119 8110

1214 119 8110

1214 119 8110

1214 119 8110

1214 119 8110

1214 119 8110

1214 119 8110

1214 119 8110

1214 119 8110

1214 119 8110

1214 119 8110

1214 119 8110

1214 119 8110

1214 119 8110

1214 119 8110

1214 119 8110

1214 119 8110

1214 119 8110

1214 119 8110

1214 119 8110

1214 119 8110

1214 119 8110

1214 119 8110

1214 119 8110

1214 119 8110

1214 119 8110

1214 119 8110

1214 119 8110

1214 119 8110

1214 119 8110

1214 119 8110

1214 119 8110

1214 119 8110

1214 119 8110

1214 119 8110

1214 119 8110

1214 119 8110

Selective refining of residual and distillate oils by the
P. A. Il'in and R. A. Kodanovskaya method. H. M.
Rylak and A. I. Skobla. *Trudy Konferentsii VNIIO*
Neftepromyshlennogo (High-Grade Lubricating Oils) Oct., 1936,
24-34(1937); cf. Russ. pat. 50,102, C. A. 31, 8001.---
Selective treatment with PhNO_2 in a H_2SO_4 soln. was
satisfactory for concentrates of paraffinic oils; it was less
satisfactory for distillate oils than furfural treatment.
A. A. Hochlingk

ASB SLA METALLURGICAL LITERATURE CLASSIFICATION

22

Can

The preparation of tractor oils from Grozny mixed-base crude oil. B. M. Revak and A. I. Skolob. *Neftyanoe Mashinostroyeniye* No. 1, 1938, pp. 1-4. Tractor lubricating oils with a viscosity index of 70 and a pour point of -15° can be prepared from corresponding Grozny mixed crude oil distillates, which must be treated with 10% by vol of furfural, dehydrated with a benzene-acetone mixt. (65:35) and treated with 1% acid and 1% clay. The yield of the finished product amounts to 60% for automobile oil "No. 10" and 50% for automobile oil "No. 14". A. A. Boshitskiy.

Method for the determination of the potential content of lubricating oils in stripped crude oils. A. I. Skoblo, *Azerbaidzhan'skoe Neftnashie Khos.* 1938, No. 4, 11 B. The stripped crude oil to be analyzed is heated to 40-50° and mixed with equal vols. of kerosene b. 200-300° (total 400 g.) and charged into a container placed above the still. The

still consists of a coil and a vessel immersed in a lead bath and heated to 370°C. ($\pm 1^\circ$). The distn. carried out at a residual pressure of 20 mm. while passing 10 min. of the oil per min. The distillate obtained is tested and if needed broken up into fractions to det. the properties of individual cuts. The procedure is described. A. A. Buchtingk.

ASB-SLA METALLURGICAL LITERATURE CLASSIFICATION

SPORLO, A. I.

Author, "Fundamental Elements of the Technological
Calculations for the Construction of Crude Oil In-
stallations; Azerbaijanian United Scientific and
Technical Pub. houses, Baku, 1939
About calculation determining yields and fractional
compositions of gasoline, in USSR

Soviet Source: N: Nefti SSSR, Moscow-Lenin-
grad, 1945

Abstracted in USAF "Treasure Island", on file
in Library of Congress, Air Information Division,
Report No. 27258. Unclassified

CH

The use of vacuum for increasing the efficiency of separation of fractions in rectification. A. I. Shukla and Z. A. Pratskaya. *Nefteprom Khim* 24, No. 5, 70 (1960).
Reduced pressure results in higher efficiency chiefly in the separation of hydrocarbons whose boiling point is less than 100°C.
Boris C. Motron

ASB-33 A METALLURGICAL LITERATURE CLASSIFICATION

SKOBLO, A.I., redaktor; LUKASHEVICH, I.P., kandidat tekhnicheskikh nauk,
retsensent; L'VOVA, L.A., vedushchiy redaktor; POLOSINA, A.S.,
tekhnicheskiy redaktor

[Technical analysis of fuels and mineral oils] Tekhnicheskii analiz
topliv i mineral'nykh masel. Moskva, Gos.nauchno-tekhn.izd-vo neft.
i gorno-toplivnoi lit-ry, 1951. 566 p. (MLRA 10:9)
(Liquid fuels) (Petroleum products) (Mineral oils)

SKoblo, A.I.

✓ 914. METHOD FOR DETERMINING POTENTIAL LUBRICANT CONTENT OF
PETROLEUM. Skoblo, A.I., Pavlova, S.N. and Litvinova, L.K. (Moscow:
Gostoptekhnika, 1955. "Methods of examining petroleum and petroleum
products (Metody issledovaniya neftei i nefteproduktov)". 62-62: abstr. in


SKOBI, A-4

The influence of the hydrodynamic conditions and of the
 geometry of the cap plates on the formation of inter-
 face waves is investigated. The results of the experiments
 are presented in the form of graphs and photographs.
 The experiments were carried out in a water tunnel with
 a flow velocity of 1.5 m/sec. The cap plates were made
 of glass and had a diameter of 10 mm. The flow was
 directed upwards through the cap plates. The results
 show that the formation of interface waves is strongly
 influenced by the geometry of the cap plates and by the
 flow velocity. The most important results are:
 (1) the interface waves are most pronounced for
 cap plates with a diameter of 10 mm; (2) the interface
 waves are most pronounced for flow velocities of 1.5
 m/sec; (3) the interface waves are most pronounced
 for cap plates with a diameter of 10 mm and for flow
 velocities of 1.5 m/sec. The results of the experiments
 are presented in the form of graphs and photographs.
 The experiments were carried out in a water tunnel with
 a flow velocity of 1.5 m/sec. The cap plates were made
 of glass and had a diameter of 10 mm. The flow was
 directed upwards through the cap plates. The results
 show that the formation of interface waves is strongly
 influenced by the geometry of the cap plates and by the
 flow velocity. The most important results are:
 (1) the interface waves are most pronounced for
 cap plates with a diameter of 10 mm; (2) the interface
 waves are most pronounced for flow velocities of 1.5
 m/sec; (3) the interface waves are most pronounced
 for cap plates with a diameter of 10 mm and for flow
 velocities of 1.5 m/sec.

2
 10/1/60

"APPROVED FOR RELEASE: 03/14/2001

CIA-RDP86-00513R001551020015-1

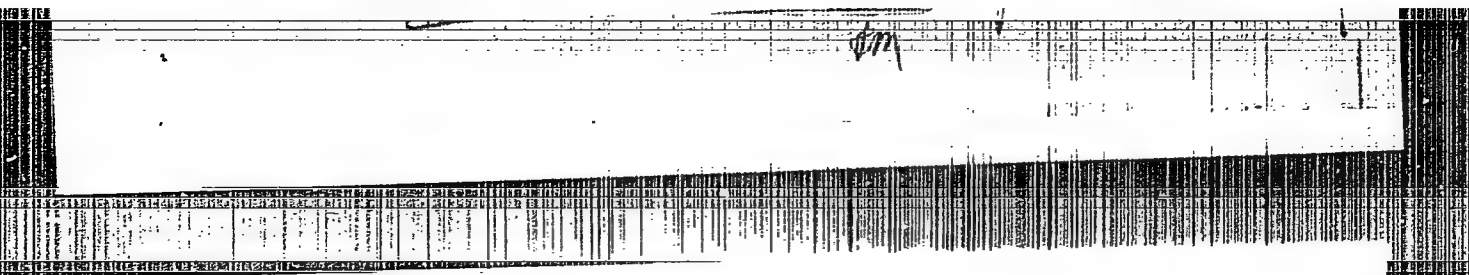

APPROVED FOR RELEASE: 03/14/2001

CIA-RDP86-00513R001551020015-1"

SA 611 11.1
AUTHORS: Barsukov, Ye.Ya. and Skoblo, A.I.

65-10-5/13

TITLE: On the Hydrodynamic Stability of a Catalyst Layer in
Separating Installations of Crude Oil Processing Plants
(O gidrodinamicheskoy ustoychivosti sloya katalizatora v
separiruyushchikh ustroystvakh apparatov dlya pererabotki
nefti)

PERIODICAL: Khimiya i Tekhnologiya Topliva i Masel, 1957, No.10,
pp. 21 - 28 (USSR)

ABSTRACT: The results of an investigation carried out by VNII NP
(All-Union Scientific Research Institute of the Petroleum
Industry) of the following problems are described: 1) A study
of the hydrodynamics of the process of separation of gas stream
from a layer of granular material; 2) A study of the cause of
carry-over of a granular material in industrial installations;
3) Development of a method of designing separating equipment
which would permit the choice of optimal operating conditions,
and 4) a comparative evaluation of various types of separating
equipment. In the study of the mechanism of the process of
separation of a gas stream from a layer, transparent models were
used in which the separation process in parallel and counter
current flows could be observed. Measurements of the velocity
of the gas stream leaving a layer of a granular material were

Card1/4

65-10-5/13

On the Hydrodynamic Stability of a Catalyst Layer in Separating
Installations of Crude Oil Processing Plants

carried out with pneumeters and according to M.E. Aerov's method (Ref. 6 - the velocity curve of gas is determined on the basis of the intensity of the mass transfer from the surface of naphthalene grains into the gas stream). Both methods gave similar results. Studies of the mechanism of gas separation from a layer of stationary and moving granular material indicated that under industrial conditions, three main types of separation are possible: 1) with low gas velocities the usual filtering of the gas through the layer takes place. The surface of the layer formed under the natural repose angle is characterised by the stationary position of particles for a stationary layer and by their movement in the fields of gravity together with the whole granular mass for the moving layer. 2) The second type of separation is determined by the unstable state of particles in the immediate neighbourhood of the walls of the separator, similar to boiling, but without breaking of contact between particles in the remaining part of the layer. 3) At high gas velocities, the third type of the process takes place. It is characterised by a break in the normal separation, accompanied by the growth of the layer in the free space of the

Card 2/4

65-10-5/13

On the Hydrodynamic Stability of a Catalyst Layer in Separating
Installations of Crude Oil Processing Plants

separator, followed by a carry-over of the granular material into the gas outlet system. It was established by visual observations and measurements that the distribution of velocities of gas leaving the layer is in many cases non-uniform. The maximum velocity is at the walls (Fig.2). In order to establish the influence of the intensity of the gas stream on the value of maximum velocity, a series of experiments within a wide range of Reynolds numbers ($Re_{layer} = 400 - 5000$) and wide fractions of granular materials (balls and tablets) was carried out. By mathematical treatment of the experimental results, formulae for the determination of maximum velocities of the gas stream of the walls for direct and counter-current streams were obtained (Eqs. 1 and 2, respectively). The choice of the optimum gasodynamic conditions of the operation of a separator and the determination of the best conditions at which the process is characterised by a maximum amount of separated gas consist in finding the critical value of the maximum velocity above which the normal separation of gas ceases. On the basis of the theory of similarity and the experimental data (Table 1), a formula for the critical velocity (9) was

Card3/4

65-10-5/13

On the Hydrodynamic Stability of a Catalyst Layer in Separating Installations of Crude Oil Processing Plants

obtained. For practical calculations, simplified formulae (10) and (11) can be used. Similar formulae (16, 17) were also obtained by treating the experimental data according to the Lyakhovskiy method (Ref.9), using Slikhter and Kirpichev criteria. The equations obtained were used for check calculations of two types of industrial separators. The initial data and the results of calculations are given in Table 2. The results obtained confirmed the correctness of the proposed method. It was also established that the efficiency of separation with descending gas stream can be increased by fixing dumping plates at an angle of the natural repose to the bottom part of the walls of the separator. Characteristic distribution curves of gas velocities at the outlet from a layer in the presence (Curve 1) and absence (Curve 2) of dumpers are shown in Fig.2. There are 2 figures, 2 tables and 9 Russian references.

ASSOCIATION: VNII NP

AVAILABLE: Library of Congress
Card 4/4

MOLOKANOV, Yu.K.; SKOBLO, A.I.

Hydraulic calculations of slots for plate-column bubbling caps.
Izv. vys. ucheb. zav.; neft' i gaz no. 3:109-116 '58. (MIRA 11:7)

1. Moskovskiy neftyanoy institut im. akad. I.M.Gubkina.
(Plate towers)

KORNEYEV, Yu.K.; SKOBLIO, A.I.

Effect of pressure on the relative volatility index during extractive distillation. Izv.vys.ucheb.zav.; neft' i gaz. no.7:57-65
'58. (MIRA 11:11)

1. Moskovskiy neftyanoy institut im akad. I.M. Gubkina.
(Distillation) (Essences and essential oils)

5401500, A.I.
KRUGLOV, S.A.; SKOBLO, A.I.

Investigating convective heat transfer between a granular material
and a gas stream. Khim i tekhn. topl. i masel 3 no.3:23-30 Mr '58.
(MIRA 11:3)

1. Moskovskiy neftyanoy institut im akademika I.M. Gubkina.
(Heat--Transmission)
(Fluidization)

BRAZHNIKOV, Vasilii Timofeyevich. Prinimal uchastiye: MALINOVSKAYA,
N.P., inzh., SKOBLO, A.I., retsenzent; BONDARENKO, B.I.,
retsenzent; YEFREMOVA, T.D., vedushchiy red.; MUKHINA, E.A.,
tekhn.red.

[Present-day units for manufacturing lubricating oils]
Sovremennye ustanovki dlia proizvodstva smazochnykh masel.
Moskva, Gos.nauchno-tekhn.izd-vo neft. i gorno-toplivnoi
lit-ry, 1959. 355 p. (MIRA 12:11)
(Lubrication and lubricants)

LEBILLO, L. I., BIK, B. I., LITVINOV, L. A., LITVINOV, K. P.,
ALEYNIK, A. S., BERNIKOV, A. P., KAMIN, L. P., OLYAVALON, P. V.,
KORNEV, L. I., KORNILOV, V. P., RYBANKIN, A. I.

"Processes of Continuous Thermocontact Transformation of Crude Oil
on Coke."

Report^{1, 2} submitted at the Fifth World Petroleum Congress, 30 May -
5 June 1959. New York.

5(3), 11(5)

SOV/152-59-1-10/31

AUTHORS: Molokanov, Yu. K., Skoblo, A. I.

TITLE: Mechanical Carrying-over of a Liquid by Gas in Plate Columns
(Mekhanicheskiy unos zhidkosti gazom v tarel'chatykh kolon-
nakh)

PERIODICAL: Izvestiya vysshikh uchebnykh zavedeniy. Neft' i gaz, 1959,
Nr 1, pp 49-55 (USSR)

ABSTRACT: The investigations referred to in publications (Refs 1-10) show that the design of the plate in plate columns has a major effect on the amount of liquid carried over. In the present article this effect is more closely studied. In order to do so a model of the plate was made of organic glass. The setup used is described. With regard to the effect on the carrying-over of the liquid the plate designs may be classed in two groups: those with a restricted and those with a free bubbling level. In the first group the devices for introducing the gas into the liquid take up only part of the liquid level on the plate. The bubbling level is formed at the expense only of the liquid level not covered by the above device. This group comprises all cap plate designs in which the caps are not submerged. The second group

Card 1/3

SOV/152-59-1-10/51

Mechanical Carrying-over of a Liquid by Gas in Plate Columns

is that of bubbling plates in which the devices for introducing the gas into the liquid are below the liquid level. In this case almost all of the free liquid surface makes up the bubbling level. In this group we find the net- and grid-plates of the "Yuniflaks" type. Formula (1) for the determination of the amount of liquid carried over is given. The formula shows that within the range of air velocities of 1-3 m/sec the amount carried over increases in proportion with the rate of flow of the gas. The amount of liquid carried over is much greater when the "share" γ of the bubbling level (i.e. the ratio between the surface of the bubbling level and the free surface of the column) is reduced: the increase is proportional to γ^2 . On the basis of the evaluation of data found experimentally formula (2) was developed from which the correction factor for various bubbling depths can be calculated. Furthermore, formula (3) was obtained for the correction factor in which the degree of dispersion of drops of the liquid is considered. Formula (4) is also given, by which the gas (steam) velocity can be determined, if the amount of liquid carried over is known. It is shown that the great advantage of the plate with a free bubbling level over the cap

Card 2/3

Mechanical Carrying-over of a Liquid by Gas in Plate Columns SOV/152-59-1-10/51

plates of regular design lies in the fact that Ψ is larger, almost 1. It is also shown that the output of a column is increased by the 1.7-2-fold if the cap plate is replaced by a plate with a free bubbling level (net- and grid-plates or those of the "Yuniflaks" type). Eventually, the possibility of obtaining reliable data by the use of models of relatively small dimensions is shown. There are 4 figures, 1 table, and 10 references, 6 of which are Soviet.

ASSOCIATION: Moskovskiy institut neftekhimicheskoy i gazovoy promyshlennosti im. akad. I. M. Gubkina (Moscow Institute of the Petroleum-chemical and Gas Industry imeni Academician I. M. Gubkin)

SUBMITTED: September 26, 1958

Card 3/3

5(4)

SOV/152-59-2-21/32

AUTHOR:

Skoblo, A. I., Korneyev, Yu. K.

TITLE:

On the Calculation of Rectifying Columns for Extraction Distillations (K raschetu rektifikatsionnykh kolonn dlya ekstraktsionnoy peregonki)

PERIODICAL:

Izvestiya vysshikh uchebnykh zavedeniy. Neft' i gaz, 1959, Nr 2, pp 83 - 87 (USSR)

ABSTRACT:

In spite of the extensive use made of extraction distillation there are, as yet, no reliable methods at hand for the calculation of rectifying columns. The method presented in this article is based on the use of the common activity coefficient γ_0 , which can easily be determined by experimentation. The dependence of the quantity γ_0 on temperature, which is found experimentally, may further be used for many other calculations (Ref 8). The application of universally valid methods for the calculation of the rectifying process of ideal binary mixtures (Ref 9) for the extraction distillation requires the determination of the following data: temperature and pressure in the column,

Card 1/5

On the Calculation of Rectifying Columns for Extraction Distillations SOV, 152-59-2-21/32

coefficient of relative volatility and curve of phase equilibrium, selection of boiling point limits of the initial fraction, selection of the third component. The basic formula used for the determination of temperature and pressure is the generally known isothermal equation which takes into account the deviation of the system from the laws of ideal solutions:

$$P(1 - z')\gamma_0 + P_T z' = \pi \quad (1)$$

P and P_T : elasticity of hydrocarbon vapors and the third component at the temperatures of the system; z' - molecular concentration of the third component in the liquid phase; π - pressure in the column; γ_0 - common activity

coefficient of the hydrocarbon dependent on the temperature, the concentration, and the properties of the third component (Ref 8). The coefficient of relative volatility α is determined with sufficient accuracy by means of the following formula (Ref 8):

Card 2/5

On the Calculation of Rectifying Columns for Extraction SOV/152-59-2-21/32
Distillations

$$\alpha = \frac{P_1 \gamma_{o1}}{P_2 \gamma_{o2}} \quad (2)$$

P_1 and P_2 - vapor elasticities of the divisible components at the particular temperature; γ_{o1} and γ_{o2} - their common activity coefficients. Due to the temperature differences between the upper and lower parts of the rectifying column the coefficient of relative volatility is variable. Thus it is advisable to use the average of this coefficient α_{average} .

The curves for the phase equilibrium are developed according to the value α_{average} found by means of the curve equation of the phase equilibrium of the binary system (Ref 9):

$$y = \frac{\alpha_{\text{average}} x}{1 + (\alpha_{\text{average}} - 1)x} \quad (4)$$

Card 3/5

x and y - subject to the concentration of the more volatile component in the equilibrium, liquid, and vapor phases. For

On the Calculation of Rectifying Columns for Extraction SOV/152-59-2-21/32
Distillations

determining the highest permissible boiling temperature of the non-aromatic hydrocarbon the following method is recommended. With values t_w , z' , and α_2 chosen from equation (2), the vapor elasticity of the non-aromatic hydrocarbon in the eliminating part of the column is determined:

$$P_1 = \frac{\alpha_2 \gamma_{o2} P_2}{\gamma_{o1}} \quad (5)$$

Furthermore, according to the value P_1 found at the temperature t_w its boiling point at 760 mm torr. is determined by means of equations or curves by Koks, Ashvort, Dyuring, Dyuring-Tregubov (Ref 9) etc. The quantity of the third component depends on its concentration in the liquid phase on the plates of the column z' , and on the quantity of the phlegm required. It can be expressed in the following equation:

$$G'_T = \frac{g'z'}{1 - z'} \quad (6); \quad G'_T - \text{number of moles of the third}$$

Card 4/5

On the Calculation of Rectifying Columns for Extraction SOV/152-59-2-21/32
Distillations

component; g' - number of moles of the phlegm. There are
9 references, 2 of which are Soviet.

ASSOCIATION: Moskovskiy institut neftekhimicheskoy i gazovoy promysh-
lennosti im. akad. I. M. Gubkina (Moscow Institute of the
Petroleum Chemical- and Gas Industry imeni Academician
I. M. Gubkin)

SUBMITTED: October 16, 1958

Card 5/5

MOLOKANOV, Yu.K.; SKOBLO, A.I.

Determining the entrainment speed in plate columns. Izv. vys.
ucheb. zav.; neft' i gaz 2 no.8:55-61 '59. (MIRA 12:11)

1. Moskovskiy institut neftekhimicheskoy i gazovoy promyshlennosti im.
akad. I.M. Gubkina.
(Petroleum--Refining)

3(2)

SOV/76-4-10-31/40

AUTHORS: Vdovenko, V. M., Suglovov, D. N., ~~Skoblo, A. I.~~

TITLE: Mutual Solubility in the System HNO_3 - H_2O - n.Dibutyl Ether
at 23°

PERIODICAL: Zhurnal neorganicheskoy khimii, 1959, Vol 4, Nr 10,
pp 2376 - 2379 (USSR)

ABSTRACT: The papers hitherto available on the distribution of nitric acid between water and organic solvents (Refs 1-4) contain no data on the question, how much water passes over into the organic solvent together with the acid. In order to clarify whether such solvents extract not only the acid but also acid hydrates, the system mentioned in the title was investigated. The results are summarized in table 1 and figure 1. With increasing concentration of the acid in the aqueous phase both its concentration and that of water increases in the organic phase. As figure 2 shows, each acid molecule takes along 0.6 up to 0.15 molecules water of hydration according to the concentration. At acid concentrations in the ether above 35% a distinct oxydation of the ether occurs so that the isotherms for such high concentrations were not recorded. The distribution of

Card 1/2

Mutual Solubility in the System HNO_3 - H_2O - n-Dibutyl Ether at 25°

nitric acid between water and ether is illustrated in figure 3 in the coordinate system

$\log m \gamma_{a_w}^{\frac{1}{2}}$, $\log m_E$ (m = concentration of the acid in water, m_E = concentration of the acid in ether, γ = activity coefficient of the ions H^+ and NO_3^- , a_w = activity of water in the aqueous solution, h = hydration of the acid in ether). At an acid concentration of more than 0.5% in the ether a deviation from Raoult's law can be observed. The negative deviation as it is characteristic of uranyl nitrate solutions in organic solvent, is preceded by a short period of positive deviation which is due to considerable interaction of the acid dipoles in the ethereal solution and indicates an association of acid molecules with the ether. There are 3 figures, 1 table, and 12 references, 3 of which are Soviet.

SUBMITTED: June 2, 1958

Card 2/2

GURVICH, V.L. [deceased]; SKOBLO, A.I.; SMIDOVICH, Ye.V.; ZAYTSEVA, N.P.;
KAZANSKAYA, N.S.; PETROV, V.N.; SUVOROV, A.S.; SHCHERBAKOV, A.A.

Continuous coking of heavy petroleum residues on powdered coke.
Trudy MINKHIGP no.24:298-310 '59. (MIRA 13:3)
(Petroleum coke)

SKC BLC, A.I.

PAGE 1 OF 1

807/469

Chemical technology in the oil industry (Fundamentals of Synthetic Technology in Petroleum Chemistry) Moscow, Gostekhizdat, 1960. 852 p. 3,500 copies printed.

Author: M. I. Kuznetsov, A. I. Kuznetsov, and V. A. Kuznetsov. Editor: V. A. Kuznetsov. Publisher: Gostekhizdat, Moscow.

Summary: This book is intended for engineers and chemists of petroleum refineries and chemical plants, for scientists of the national economy, planning organizations and scientific research institutes engaged in chemical processing and large-scale utilization of petroleum stock for the production of synthetic products.

Contents: The book describes important commercial methods of producing hydrocarbons, petroleum and coal stock for the manufacture of alcohols, aldehydes, ketones, acids, detergents, synthetic fibers, and synthetic rubber. Flow sheets are included, and the basic equipment of the petrochemical industry is described. The physicochemical properties and use of intermediates and end synthetic products are also described. The state of the petrochemical industry outside the USSR and prospects for its development are covered. No personalities are mentioned. Each chapter follows each chapter.

Fundamentals of Synthesis Technology (Cont.)

SOV/4659

1. Preliminary preparation of hydrocarbon gas mixtures	144
2. Purification from mechanical impurities	145
3. Purification from sulfur compounds	146
4. Removal of acetylene	150
5. Dehydration of gases	153
6. Division of gases into fractions (fractionation)	157
7. Extraction of the propane-propylene fraction and separation of propylene from propane	159
8. Extraction of ethylene and ethane	163
9. Separation of methane	175
10. Adsorption stripping of gas mixtures	176
11. Some physicochemical problems of hydrocarbon gas fractionation	181
II. Division of liquid petroleum products into fractions [A.I. Skoblo and V.A. Skoblo]	183
Adsorption	183
1. Nature of the adsorption process	184
2. Characteristics of adsorbents	185
3. Adsorption stripping of hydrocarbon mixtures	186
4. Regeneration of adsorbents	187

Card 5/21

FRIDLAND, M. I., inzh.; SKOBLO, A. I., kand.tekhn.nauk

Modeling the process of the entrainment of particles from a
fluidized bed. Khim.mash. no.5:18-21 S-O '60. (MIRA 13:9)
(Fluidization)

FRIDLAND, M.I.; SKOBLO, A.I.

Study of the process of particle entrainment from a fluidized bed.
Izv. vys. ucheb. zav.; neft' i gaz 3 no.1:71-78 '60. (MIRA 14:10)

1. Moskovskiy institut neftekhimicheskoy i gazovoy promysh-
lennosti im. akad. I.M. Gubkina.
(Petroleum--Refining)

ALEKSANDROV, I.A.; SKOBLO, A.I.

Studying the operation of demisters. Izv. vys. ucheb. zav.;
neft' i gaz 3 no.4:73-80 '60. (MIRA 15:6)

1. Moskovskiy institut neftekhimicheskoy i gazovoy promyshlennosti
akademika I.M. Gubkina.
(Oil refineries--Equipment and supplies)

FRIDLAND, M.I.; SKOBLO, A.I.

Falling of particles through a grid tray. Izv. vys. ucheb. zav.;
neft' i gaz 3 no.9:97-101 '60. (MIRA 14:4)

1. Moskovskiy institut neftekhimicheskoy i gazovoy promyshlennosti.
(Gas flow) (Plate towers)

FADEYEV, I.G.; RAZUMOV, I.M.; SKOBLO, A.I.; CHEFRANOV, O.A.

Porosity of a layer of granular material in continuous motion
in a stand pipe. Izv. vys. ucheb. zav.; neft' i gaz 3 no.11:
67-70 '60. (MIRA 14:1)

1. Moskovskiy institut neftkhimicheskoy i gazovoy promyshlennosti
imeni akademika I.M. Gubkina, Giproneftemash,
(Catalysis) (Porosity)

ALEKSANDROV, I.A.; SKOBLO, A.I.

Mechanical entrainment of liquid by gases from perforated-type
plates. Khim.i tekhn.tochl.i masel 5 no.9:42-45 S '60.
(MIRA 13:9)

1. Moskovskiy institut neftekhimicheskoy i gazovoy promyshlennosti
im.akad.Gubkina.

(Plate towers)

SKOBLO, A.I.; ALEKSANDROV, I.A.

Effect of the entrainment of liquids on the number of plates in
rectification columns. Trudy MINKHIGP no.28:80-92 '60.

(MIRA 14:4)

(Plate towers)

FRIDLAND, M.I.; SKOBLO, A.I.

Mechanical entrainment of particles by a gas in apparatus containing
a fluidized bed. Trudy MINKHIGP no.28:93-101 '60. (MIRA 14'4)
(Fluidization)

MOLOKANOV, Yu.K.; SKOBLO, A.I.

Hydraulic calculation of slots for plate-column bubbling caps.
Izv. vys. ucheb. zav.; neft' i gaz 3 no.7:77-83 '60. (MIRA 15:5)

1. Moskovskiy institut neftekhimicheskoy i gazovoy
promyshlennosti imeni akademika I.M. Gubkina.
(Plate towers)

BAGATUROV, Sergey Aleksandrovich; PLANOVSKIY, A.N., doktor tekhn. nauk,
prof., retsenzent; SKOBLO, A.I., dots. retsenzent; TREGUBOVA, I.A.,
dots., retsenzent; BABUSHKINA, S.I., vedushchiy red.; POLOSINA,
A.S., tekhn. red.

[Theory and calculation of distillation and rectification] Teoriia i
raschet peregonki i rektifikatsii. Moskva, Gos. nauchno-tekhn. izd-
vo neft. i gorno-toplivnoi lit-ry, 1961. 435 p. (MIRA 14:10)
(Distillation—Tables, calculations, etc.)

ALEKSANDROV, I.A.; SKOBLO, A.I.

Choosing the amount of fluid entrainment between plates in rectification columns. Izv. vys. ucheb. zav.; nef't' i gaz 4 no.3:53-59 '61.

(MIRA 16:10)

1. Moskovskiy institut neftekhimicheskoy i gazovoy promyshlennosti im. akademika I.M.Gubkina i Gosudarstvennyy nauchno-issledovatel'skiy i proyektnyy institut neftyanogo mashinostroyeniya.

MOLOKANOV, Yu.K.; SKOBLO, A.I.

Value of the resistance coefficient of a dry bubble cap plate.
Izv.vys.uchet.zav.;khim.i khim.tekh. 4 no.4:672-675 '61.

(MIRA 15:1)

1. Moskovskiy institut neftekhimicheskoy i gazovoy promyshlennosti
imeni I.M.Gubkina, kafedra neftezavodskogo oborudovaniya.
(Plate towers)

KHAMDI, A.M.; MOLOKANOV, Yu.K.; SKOBLO, A.I.

Amount of the initial flow of liquid over a weir downcomer. Izv.
vys. ucheb. zav.; neft' i gaz 4 no.12:89-94 '61. (MIRA 16:12)

1. Moskovskiy institut neftekhimicheskoy i gazovoy promyshlennosti
imeni akademika Leningrad.

FADEYEV, I.G., inzh.; RAZUMOV, I.M., kand.tekhn.nauk; SKOBLO, A.I., kand.tekhn.nauk; CHEFRANOV, O.A., inzh, REZNIKOVICH, K.A., kand.tekhn.nauk .

Calculation of pressure loss in the transport of a granular material in a continuous flow. Khim.mash. no.2:26-28 Mr-Apr '61.

(Pneumatic-tube transportation)

(MIRA 14:3)

FRIDLAND, M.I.; RAZUMOV, I.M.; SKOBLO, A.I.

Calculation of the amount of particles entrained by a gas in an apparatus with a fluidized bed. Khim.i tekhn. topl.i masel 6 no.2: 36-38 F '61. (MIRA 14:1)

1. Moskovskiy institut neftekhimicheskoi i gazovoi promyshlennosti im.akad.Gubkina i Giproneftemash.
(Fluidization)

SKOBLO, A.I.

Reflux systems of rectification columns. Khim.i tekhn. topl.i masel
6 no.2:64-65 F '61. (MIRA 14:1)

(Distillation apparatus)

MOLOKANOV, Yu.K.; ALEKSANDROV, I.A.; SKOBLO, A.I.

Experimental investigation of turbogrid-type plates. Khim. i tekhn.
topl. i masel 6 no. 5:34-38 My '61. (MIRA 14:5)

1. Moskovskiy institut neftekhimicheskoy i gazovoy promyshlennosti
im. akademika Gubkina.
(Plate towers)

AEROV, M.E.; CORECHENKOV, V.G.; MOLOKANOV, Yu.K.; SUM-SHIK, L.Ye.; SKOBLO,
A.I.; KHALIF, A.L.; BROZIN, I.A.; SATTAROV, U.G.

Effectiveness and maximum loads of industrial absorbers with various
bubble trays. Gaz. prom. 6 no.11:35-38 '61. (MIRA 15:1)
(Mass transfer) (Plate towers)

SKOBLO, Aleksandr Ionovich, dots.; TREGUBOVA, Irina Anan'yevna, dots.;
YEGOROV, Nikolay Nikolayevich, dots.; BONDARENKO, B.I., kand.
tekhn. nauk, retsenzent; BABUSHKINA, S.I., ved. red.;
KLEYMENOVA, K.F., ved. red.; POLOSINA, A.S., tekhn. red.

[Processes and equipment of the petroleum refining and petro-
chemicals industries] Protsessy i apparaty neftepererabaty-
vaiushchei i neftekhimicheskoi promyshlennosti. Moskva, Gos.
nauchno-tekhn.izd-vo نفت. i gorno-toplivnoi lit-ry, 1962.
652 p. (MIRA 15:2)

(Petroleum--Refining)

ALEKSANDROV, I.A.; SKOBLO, A.I.

Main characteristics and application fields of plates of various design in rectification and absorption columns. Khim. i tekhn. topl. i masel 7 no.1:45-50 Ja '62. (MIRA 15:1)

1. Gosudarstvennyy nauchno-issledovatel'skiy i proyektnyy institut neftyanogo mashinostroyeniya i Moskovskiy institut neftekhimicheskoy i gazovoy promyshlennosti im. akad.Gurkina.
(Plate towers)

ALEKSANDROV, I.A.; SKOBLO, A.I.

Determination of the amount of liquid carried off between plates
in rectification columns. Khim.i tekhn.topl.i masel 7 no.8:53-58
Ag '62. (MIRA 15:8)

1. Moskovskiy institut neftekhimicheskoy i gazovoy promyshlennosti
im. akad. Gubkina.

(Plate towers)

KHAMDI, A.M.; SKOBLO, A.I.; MOLOKANOV, Yu.K.

Determination of overflow head in plate columns. Izv.vys.ucheb.zav.;
neft' i gaz 5 no.12:53-57 '62. (MIRA 17:4)

1. Moskovskiy institut neftekhimicheskoy i gazovoy promyshlennosti
imeni akademika I.M.Gubkina.

ADEL'SON, Sof'ya Valer'yanovna; SKOBLO, A.I., dots., retsenzent;
KLEYMENOVA, K.F., ved. red.; LEVINA, Ye.S., ved. red.;
VORONOVA, V.V., tekhn. red.

[Processes and units used in petroleum refining and
petroleum chemistry] Protsepy i apparaty nefteperera-
botki i neftekhimii. Moskva, Gostoptekhizdat, 1963. 309 p.
(MIRA 16:5)

(Petroleum refineries--Equipment and supplies)

GORLOV, V.F.; SKOBLO, A.I.

Tube stills with a fluidized bed of powder fuel. Nefteper. i
neftekhim. no. 11:42-46 '63. (MIRA 17:5)

1. Moskovskiy institut neftekhimicheskoy i gazovoy promyshlennosti.

ALEKSANDROV, I.A.; SKOBLO, A.I.

Determination from the thermogram of the number of rectification column plates taking the entrainment of liquid into account. Izv.vys.ucheb. zav.;khim.i khim.tekh. 6 no.4:675-682 '63. (MIRA 17:2)

1. Moskovskiy institut neftekhimicheskoy i gazovoy promyshlennosti im. Gubkina. Kafedra neftezavodskogo oborudovaniya.

KHAMDI, A.M.; SKOBLO, A.I.; MOLOKANOV, Yu.K.

Problems of the hydraulics of overflow apparatus in plate columns.
Khim.i tekhn.topl.i masel 8 no.2:31-37 F '63. (MIRA 16:10)

1. Moskovskiy institut neftekhimicheskoy i gazovoy promyshlennosti
im. akademika Gubkina.

GORLOV, V.F.; SKOBLO, A.I.

Properties of a fluidized bed of coke in combustion. Khim.
i tekhn. topl. i masel 8 no.9:11-16 S '63. (MIRA 16:11)

1. Moskovskiy institut neftekhimicheskoy i gazovoy
promyshlennosti im. akademika Gubkina.

GORIOV, V.F.; SKOBLO, A.I.

Change in the properties of powdered coke on combustion in a
fluidized bed. Trudy MINKHIGP no.44:258-267 '63.
(MIRA 18:5)

MIKHAYLOV, P.I.; SKOBLO, A.I.

Organizing the movement of gases in tubestill heaters. Trudy
MINKHIGP no.44:278-284 '63. (MIRA 18:5)

KLEVLEYEV, M.A.; SKOBLO, A.I.

Determination of the maximum rate of the countercurrent contacting
of liquids with fine-grained materials. Khim. i tekhn. topl. i
masel 8 no.12:18-21 D '63. (MIRA 17:1)

1. Vsesoyuznyy nauchno-issledovatel'skiy institut po pererabotke
nefti i gazov i polucheniya iskusstvennogo zhidkogo topliva.

VIGVENKO, V.N.; SKOBLO, A.I.; SUGICHOV, D.N.

Enon perchlorate complex of uranyl. Radiokhimiya 6 no.6:
677-682 '64. (MIRA 18:2)

PAVEL, A.; NECHIN, A.I.; KUGLOV, S.A.

Heat exchange in a fluidized bed between a gas flow and the particles of a solid heat carrier. Izv. vys. ucheb. zav.; neft' i gaz 8 no.1:59-62 '65.

(MIRA 18:2)

1. Moskovskiy institut neftekhimicheskoy i gazovoy promyshlennosti Leni akademika I.M. Gubkina.

EMIRDZHANOV, Rauf Tairovich; SKOBLO, A.I., prof., retsenzent;
KLEYMENOVA, K.F., red.

[Principles of technological calculations in petroleum
refining] Osnovy tekhnologicheskikh raschetov v nefte-
pererabotke. Moskva, Khimiia, 1965. 543 p.
(MIRA 18:10)

12

Automatic control devices for directing fermentation processes. D. Shkiba and A. Dimalburg. *Sports. Vsesoyuznaya* From 16, No. 12, 18 (1979). A complete system for automatic control of fermentation has been developed by the Lkhvitskii Distillery, Kiev. The layout and instrument board are described and illustrated.

Julian F. Smith

634 514 METALLURGICAL LITERATURE CLASSIFICATION

SKOBLO, D.I.

POPOV, V.I.; DOBROSKEDOV, L.L.; STABNIKOV, V.N.; ANDREYEV, K.P.;
ZNAMENSKIY, G.M., professor, ratsenzent; SKOBLO, D.I., kandi-
dat tekhnicheskikh nauk, ratsenzent; SEREGIN, P.V., kandidat
tekhnicheskikh nauk, ratsenzent; IZRAILEVICH, L.A., inzhener,
ratsenzent; MASLOVA, Ye.F., redaktor; DUBOVKINA, N.A., tekhnicheskiiy redaktor.

[Technological equipment for fermentation industries] Tekhnologicheskoe oborudovanie brodil'nykh proizvodstv. Moskva, Pishchepromizdat, 1953. 515 p. (MLRA 7:8)
(Distilling industries) (Brewing industries)

SKOBLO, D. I.

Continuous process for production of alcohol from sirup.
A. P. Berenshtein, D. I. Skoblo, and S. P. Gulyaev. *Trudy*
Kiev. Filiala Vsesoyuz. Nauch. Issledovatel. Inst. Spirtnoi
Prom. 1953, No. 1, 60-87; *Referat. Zhur., Khim.* 1954, No.
50841.—In the outlined process the 1st fermentation tank is
used for growing yeast. The continuous fermentation is
carried out in 2 stages, in the 1st of which, comprising 5-7
tanks, the greater part of the sugar is fermented; the fer-
mentation is finished in successive tanks which are of smaller
capacity. Through these tanks the mash is circulated for-
cibly at a rate 3-4 times faster than in the 1st stage. In
this process the sirup is acid-sterilized in place of steam. In
this method of production gave a higher yield of alc. per
ton of starch and resulted in considerable economies of water,
steam, antifoam agents, and manpower. M. Hosen

SKOBLO, D.I.

✓ Automatic remote-control apparatus for sirup-alcohol
plants. D. I. Skoblo and A. U. Mamunya, *Trudy Kiev.
Fiziko Vsesoyuz. Nauch.-Issledovatel. Inst. Spirtovol Prom.*
CH 1953, No. 1, 151-8; *Referat. Zhur., Khim.* 1954, No. 50835.
—An automatic pH meter and hydrometer for sirups are
described. M. Hosh

ARONOVICH, Vladimir Veniaminovich, kandidat tekhnicheskikh nauk; KUZNETSOV, N.M., retsenzent; SKOBLO, D.I., retsenzent; SELEGIN, P.V., spets-redaktor; MASLOVA, Ye.F., redaktor; GOTLIB, E.M., tekhnicheskii redaktor

[Instruments and regulators in the distilling industry] Pribury i regulatory spirtovoi promyshlennosti. Moskva, Pishchepromizdat, 1956.
300 p. (MIRA 9:12)

(Distilling industries--Equipment and supplies)